

Mounting instructions:

Insert fitting clamps (1) of tow mirror into space between lens and head of the vehicle mirror (1).


Fix the tow mirror by turning the clamps (2) tight.

Adjust the length of the rubber strap (3) and fix the safety rubber strap to the lower edge of the vehicle mirror (3).



Adjust and rotate mirror arm with knob(s) (4).

Adjust mirror head (rotating on ball-joint (5)) to guarantee optimal visibility.


Have a nice journey.

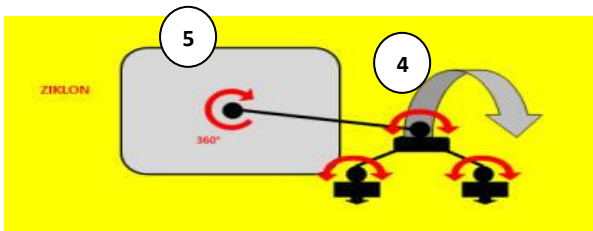

ZIKLON

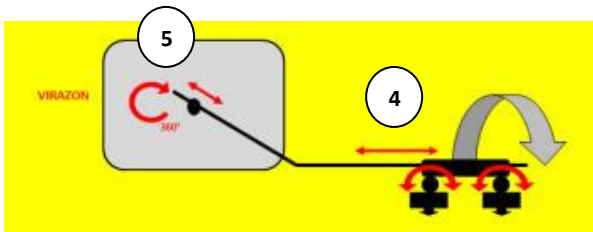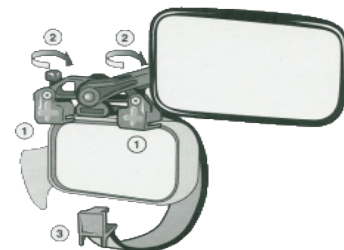

VIRAZON

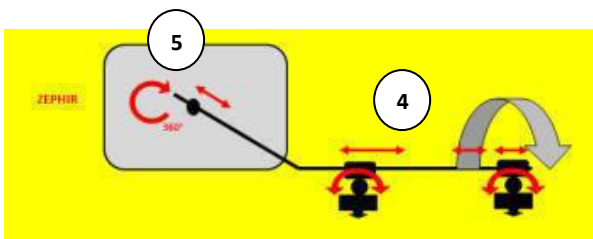

ZEPHIR

